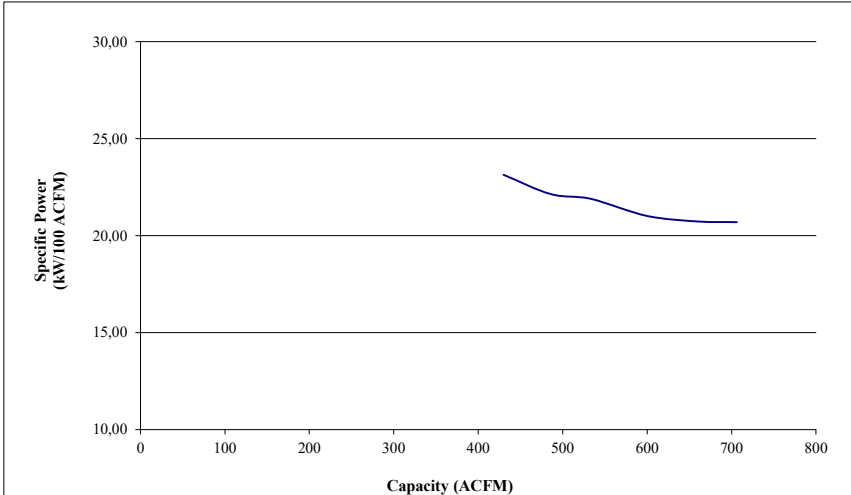


COMPRESSOR DATA SHEET
Federal Uniform Test Method for Certain Air Compressors Not Applicable
Rotary Compressor: Variable Frequency Drive
MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Hertz Kompressoren		
2	Model Number: EAGLE-N 110		Date: 11.28.25
	☐ Air-cooled	☒ Water-cooled	Type: Screw
	☐ Oil-injected	☒ Oil-free	# of Stages: 2
3	Full Load Operating Pressure	125	psig ^b
4	Drive Motor Nominal Rating	150	hp
5	Drive Motor Nominal Efficiency	96,3%	percent
6	Fan Motor Nominal Rating (if applicable)	1,02	hp
7	Fan Motor Nominal Efficiency	NA	percent
8*	Input Power (kW)		Capacity (acfm) ^{a,d}
	146,2 Max		706,2
	137,1		661,4
	126,2		600,5
	116,8		533,5
	107,6		485,8
	99,5 Min		429,8
9*	Total Package Input Power at Zero Flow ^{c,d}		81,3 kW
11	 Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity		

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator

Consult CAGI website for a list of participants in the third party verification program:

www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ / min	ft ³ / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	