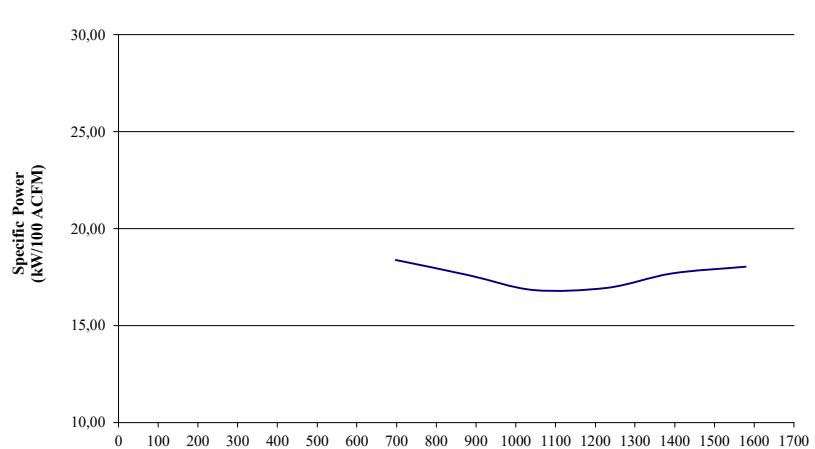


COMPRESSOR DATA SHEET
Federal Uniform Test Method for Certain Air Compressors Not Applicable
Rotary Compressor: Variable Frequency Drive


MODEL DATA - FOR COMPRESSED AIR				
1	Manufacturer: Hertz Kompressoren			
2	Model Number: EAGLE-N 250	Date: 01.22.26		
	<input type="checkbox"/> Air-cooled <input checked="" type="checkbox"/> Water-cooled	Type: Screw		
	<input type="checkbox"/> Oil-injected <input checked="" type="checkbox"/> Oil-free	# of Stages: 2		
3	Full Load Operating Pressure	100	psig ^b	
4	Drive Motor Nominal Rating	340	hp	
5	Drive Motor Nominal Efficiency	96,4%	percent	
6	Fan Motor Nominal Rating (if applicable)	1,42	hp	
7	Fan Motor Nominal Efficiency	NA	percent	
8*	Input Power (kW)		Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	284,6	Max	1578,0	18,04
	246,5		1392,8	17,70
	208,7		1230,7	16,96
	176,0		1045,4	16,84
	155,4		883,3	17,59
	128,3	Min	698,0	18,38
9*	Total Package Input Power at Zero Flow ^{c,d}		89,3	kW
11	 <p style="text-align: center;">Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acf m increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</p>			

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E;
ACFM is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
<u>m³ / min</u>	<u>ft³ / min</u>	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	
1.5 to 15	53 to 529.7	+/- 5	+/- 6	+/- 10%
Above 15	Above 529.7	+/- 4	+/- 5	